

Medium Duty Cable Tray – Hot Dip Galvanised

Medium Duty Perforated Cable Tray | 25 mm Wall | 3 m Length | Hot Dip Galvanised | 50 – 600 mm

Direct Channel Medium Duty Cable Tray is a versatile perforated tray for general power and data cable distribution. The 25 mm return-flanged sidewalls add rigidity, and the slotted base and sides accept cable ties, cleats and accessories anywhere along the run.

Roll-formed from steel in standard 3 metre lengths with $\varnothing 8.5 \times 20$ mm slotting; material thickness increases with width (see Available Sizes). Supplied Hot Dip Galvanised (HDG) after manufacture for external and corrosive environments. Widths from 50 mm to 600 mm.


SPECIFICATION

Product Type	Medium duty perforated cable tray
Wall Height	25 mm
Standard Length	3000 mm (3 m)
Flange	25 mm return flange
Perforation	$\varnothing 8.5 \times 20$ mm slots
Material Thickness	By width — see Available Sizes
Widths	50 – 600 mm
Finish	Hot Dip Galvanised (HDG)
Compatibility	Matching bends, tees, risers, crossovers & couplers
Supply	Per 3 m length

KEY FEATURES

• 25 mm return-flanged sidewalls	• $\varnothing 8.5 \times 20$ mm perforation
• Slotted base for cable fixing	• Widths 50 – 600 mm
• Standard 3 m lengths	• Full matching fittings range
• Hot Dip Galvanised (HDG)	• Rigid, versatile containment

TECHNICAL DRAWING

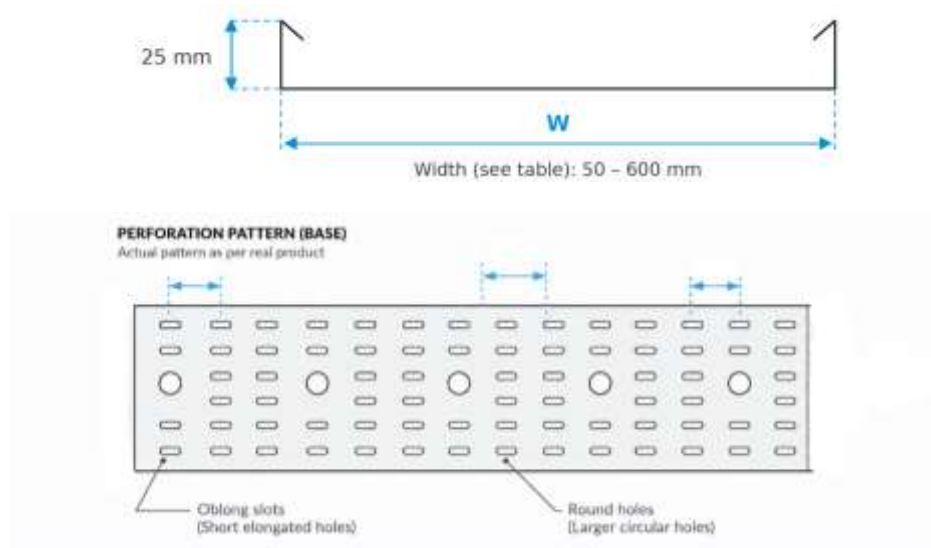

Medium Duty Cable Tray — cross-section and base detail, dimensions in mm, not to scale

AVAILABLE SIZES

Width (mm)	Thickness (mm)	Code
50	0.9	CPM50G
75	0.9	CPM75G
100	0.9	CPM100G
150	0.9	CPM150G
225	1.0	CPM225G
300	1.0	CPM300G
450	1.2	CPM450G
600	1.2	CPM600G

All lengths 3000 mm (3 m), 25 mm return-flanged wall, $\varnothing 8.5 \times 20$ mm slotted. Hot Dip Galvanised (HDG) after manufacture for external and corrosive environments. Also available Pre-Galvanised (PG). Matching bends, tees, risers, crossovers and couplers available. Load capacities on request.

TYPICAL APPLICATIONS

Power & data cable distribution	Industrial & commercial installations
Building services & M&E	External & corrosive environments
Plant rooms & service risers	Long-span cable support

To Order: Visit directchannel.uk.com or call **0121 270 8507** | Trade & bulk enquiries: sales@directchannel.uk.com | Most orders dispatched same or next working day.

DISCLAIMER & LEGAL NOTICE

Direct Channel Support Systems Ltd has made every reasonable effort to ensure the accuracy and completeness of the information contained in this datasheet. All product specifications, dimensions, and technical details are provided for guidance purposes only. Direct Channel Support Systems Ltd reserves the right to alter, update, or withdraw any product or specification at any time and without prior notice. To the fullest extent permitted by law, Direct Channel Support Systems Ltd accepts no liability for any loss, damage, or consequential loss arising from reliance on the information contained herein. Customers are advised to verify all specifications prior to ordering. For the most current product information visit directchannel.uk.com or contact our sales team.