

Heavy Duty Cable Tray – Hot Dip Galvanised

Heavy Duty Perforated Cable Tray | 50 mm Wall | 3 m Length | Hot Dip Galvanised | 50 – 600 mm

Direct Channel Heavy Duty Cable Tray is a deep, strong perforated tray for medium and heavy cable loads over long spans. The 50 mm return-flanged sidewalls give high rigidity, while the slotted base and sides allow accessories to be fixed anywhere along the run.

Roll-formed from steel in standard 3 metre lengths with $\varnothing 8.5 \times 20$ mm slotting; material thickness increases with width (see Available Sizes). Supplied Hot Dip Galvanised (HDG) after manufacture for external and corrosive environments. Widths from 50 mm to 600 mm.


SPECIFICATION

Product Type	Heavy duty perforated cable tray
Wall Height	50 mm
Standard Length	3000 mm (3 m)
Flange	50 mm return flange
Perforation	$\varnothing 8.5 \times 20$ mm slots
Material Thickness	By width — see Available Sizes
Widths	50 – 600 mm
Finish	Hot Dip Galvanised (HDG)
Compatibility	Matching bends, tees, risers, crossovers & couplers
Supply	Per 3 m length

KEY FEATURES

• 50 mm return-flanged sidewalls	• $\varnothing 8.5 \times 20$ mm perforation
• Slotted base for cable fixing	• Widths 50 – 600 mm
• Standard 3 m lengths	• Full matching fittings range
• Hot Dip Galvanised (HDG)	• Heavy gauge — long-span support

TECHNICAL DRAWING

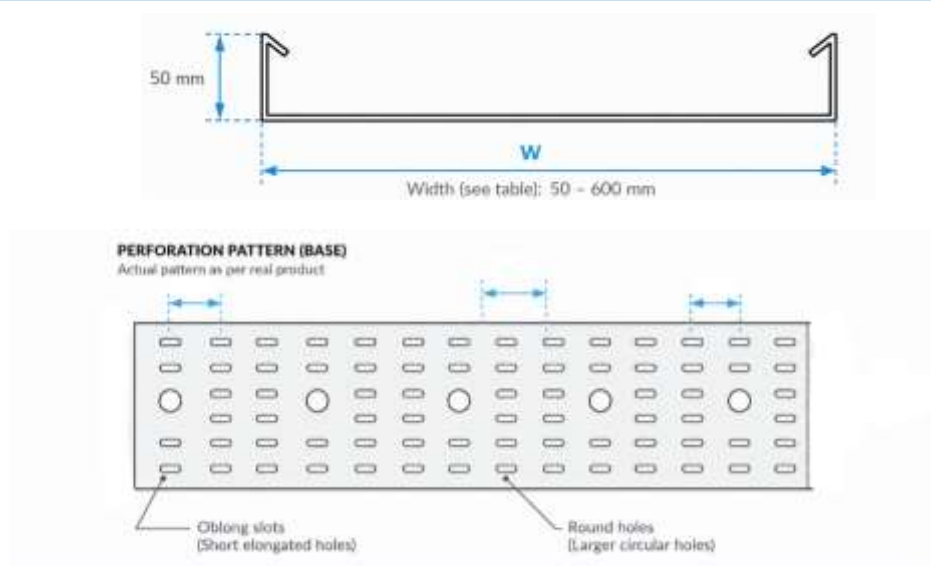

Heavy Duty Cable Tray — cross-section and base detail, dimensions in mm, not to scale

AVAILABLE SIZES

Width (mm)	Thickness (mm)	Code
50	0.9	CPXL50G
75	0.9	CPXL75G
100	0.9	CPXL100G
150	0.9	CPXL150G
225	1.0	CPXL225G
300	1.0	CPXL300G
450	1.2	CPXL450G
600	1.5	CPXL600G

All lengths 3000 mm (3 m), 50 mm return-flanged wall, $\varnothing 8.5 \times 20$ mm slotted. Hot Dip Galvanised (HDG) after manufacture for external and corrosive environments. Also available Pre-Galvanised (PG). Matching bends, tees, risers, crossovers and couplers (CPXL50C-G.Q2) available. Load capacities on request.

TYPICAL APPLICATIONS

Power & data cable distribution	Industrial & commercial installations
Building services & M&E	External & corrosive environments
Plant rooms & service risers	Long-span cable support

To Order: Visit directchannel.uk.com or call **0121 270 8507** | Trade & bulk enquiries: sales@directchannel.uk.com | Most orders dispatched same or next working day.

DISCLAIMER & LEGAL NOTICE

Direct Channel Support Systems Ltd has made every reasonable effort to ensure the accuracy and completeness of the information contained in this datasheet. All product specifications, dimensions, and technical details are provided for guidance purposes only. Direct Channel Support Systems Ltd reserves the right to alter, update, or withdraw any product or specification at any time and without prior notice. To the fullest extent permitted by law, Direct Channel Support Systems Ltd accepts no liability for any loss, damage, or consequential loss arising from reliance on the information contained herein. Customers are advised to verify all specifications prior to ordering. For the most current product information visit directchannel.uk.com or contact our sales team.