

A4 Stainless Steel Cable Ties

200-360mm | 4.6mm Wide | A4 / 316 Stainless Steel | Non-Releasable | Packs of 100

Direct Channel A4 stainless steel cable ties are metal fastening ties for cable bundling and securing applications where a corrosion-resistant fastening material is required.

The range is manufactured from A4 / 316 stainless steel and includes 200mm, 300mm and 360mm nominal lengths. Each tie is 4.6mm wide, non-releasable and supplied in a pack of 100.


SPECIFICATION

Product Type	Stainless steel cable tie
Material	A4 / 316 stainless steel
Locking Type	Non-releasable
Lengths	200mm, 300mm and 360mm
Width	4.6mm
Finish	Stainless steel
Supply	Pack of 100
Primary Use	Corrosion-resistant cable bundling / securing

KEY FEATURES

• A4 / 316 stainless steel	• 4.6mm tie width
• Three nominal lengths	• Non-releasable fastening
• Packs of 100	• Suitable for demanding environments
• Metal cable-management solution	• No separate fixing components required

TECHNICAL DRAWING

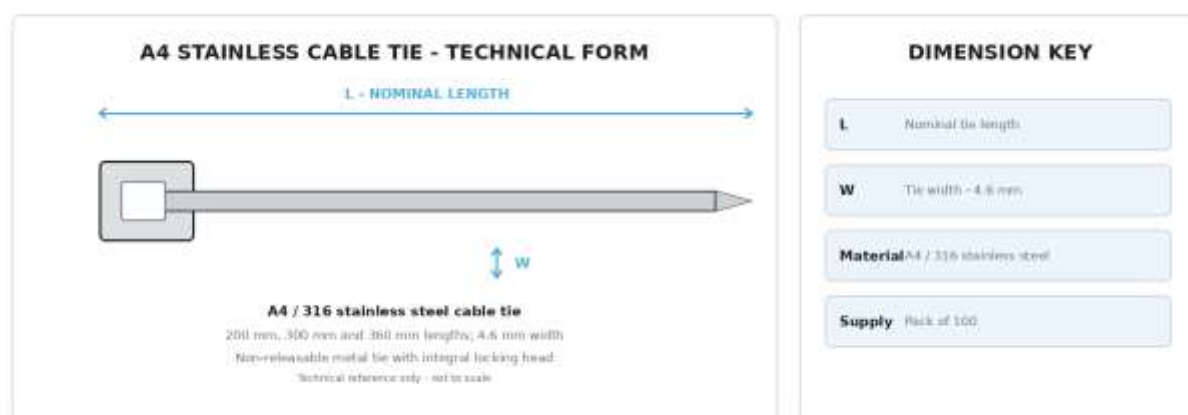

Technical reference showing the basic A4 stainless steel cable tie form. L = nominal tie length and W = 4.6mm tie width. Not to scale.

AVAILABLE OPTIONS / PRODUCT RANGE

SKU	Nominal Size	Material	Pack Qty
T200A4	200 x 4.6 mm	A4 / 316 stainless	100
T300A4	300 x 4.6 mm	A4 / 316 stainless	100
T360A4	360 x 4.6 mm	A4 / 316 stainless	100

All listed items are A4 / 316 stainless steel cable ties, 4.6mm wide and supplied in packs of 100. No prices are included.

TYPICAL APPLICATIONS

External cable bundling	Marine / coastal installations
Industrial cable management	Electrical and M&E installations
Data / control cable securing	Corrosion-resistant fastening

To Order: Visit directchannel.uk.com or call **0121 270 8507** | Trade & bulk enquiries: sales@directchannel.uk.com | Most orders dispatched same or next working day.

DISCLAIMER & LEGAL NOTICE

Direct Channel Support Systems Ltd has made every reasonable effort to ensure the accuracy and completeness of the information contained in this datasheet. All product specifications, dimensions, and technical details are provided for guidance purposes only. Direct Channel Support Systems Ltd reserves the right to alter, update, or withdraw any product or specification at any time and without prior notice. To the fullest extent permitted by law, Direct Channel Support Systems Ltd accepts no liability for any loss, damage, or consequential loss arising from reliance on the information contained herein. Customers are advised to verify all specifications prior to ordering. For the most current product information visit directchannel.uk.com or contact our sales team.