

Basket Tray Lids - 1.5m HDG Range

Hot Dip Galvanised Steel | 100-450mm | S235 JR | CTB...G-LD Range

Direct Channel Basket Tray Lids provide a protective cover for compatible cable basket tray systems, helping shield installed cables from dust, debris and general environmental exposure.

Manufactured from S235 JR mild steel with a hot dip galvanised finish, each lid is supplied in a 1500mm length with 13mm returned edges and pre-punched fixing holes. The listed range covers nominal basket widths of 100mm, 150mm, 200mm, 300mm and 450mm for internal and external cable-containment installations.


SPECIFICATION

Material	S235 JR mild steel
Finish	Hot Dip Galvanised (HDG)
Coating Standard	TS EN ISO 1461 / TS 822
Length	1500mm $\pm$ 3mm
Side Return	13mm $\pm$ 1mm
Fixing Holes	$\varnothing$ 6mm pre-punched
Hole Position	25mm $\pm$ 1mm from end; 12mm $\pm$ 1mm from side
Thickness	0.9mm / 1.0mm / 1.2mm depending on basket width

KEY FEATURES

1.5m hot dip galvanised steel lid 13mm returned side edges - S235 JR mild steel construction - Suitable for internal & external use	- Fits basket tray widths 100-450mm - Pre-punched $\varnothing$6mm fixing holes 0.9-1.2mm thickness by width - Compatible lid clips available separately
--	--

TECHNICAL DRAWING

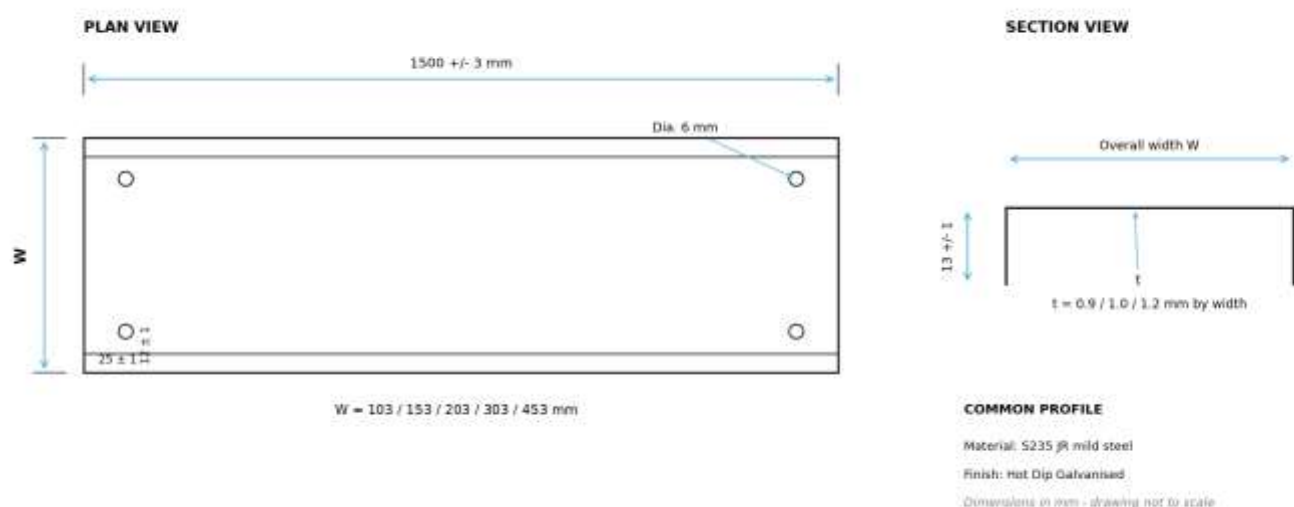

Basket tray lid - common profile and fixing-hole arrangement, drawing not to scale

AVAILABLE OPTIONS

Nominal Width	Overall Lid Width	Thickness	Code
100mm	103 ±1mm	0.9mm	CTB100G-LD
150mm	153 ±1mm	1.0mm	CTB150G-LD
200mm	203 ±1mm	1.0mm	CTB200G-LD
300mm	303 ±1mm	1.2mm	CTB300G-LD
450mm	453 ±1mm	1.2mm	CTB450G-LD

All lids are 1500mm long with 13mm returned edges and Ø6mm fixing holes. Overall lid width is nominal basket width + 3mm. Use the appropriate compatible lid fixing / hold-down clip for the basket system; clips are supplied separately.

TYPICAL APPLICATIONS

Cable basket lid / cover installations	Commercial & industrial M&E
Internal cable containment	Plant rooms & service routes
External HDG containment	Cable management runs

To Order: Visit directchannel.uk.com or call **0121 270 8507** | Trade & bulk enquiries: sales@directchannel.uk.com | Most orders dispatched same or next working day.

DISCLAIMER & LEGAL NOTICE

Direct Channel Support Systems Ltd has made every reasonable effort to ensure the accuracy and completeness of the information contained in this datasheet. All product specifications, dimensions, and technical details are provided for guidance purposes only. Direct Channel Support Systems Ltd reserves the right to alter, update, or withdraw any product or specification at any time and without prior notice. To the fullest extent permitted by law, Direct Channel Support Systems Ltd accepts no liability for any loss, damage, or consequential loss arising from reliance on the information contained herein. Customers are advised to verify all specifications prior to ordering. For the most current product information visit directchannel.uk.com or contact our sales team.