

Cable Basket Tray - 60mm Depth - Electro Zinc

800mm-3 Metre Lengths | 60mm Depth | 60-450mm Widths | Electro Zinc | Indoor Use

Direct Channel 60mm deep cable basket tray provides an open wire containment system for supporting power, data and communications cabling in dry internal environments. The open mesh design gives easy cable access and ventilation while providing a practical route for commercial and industrial cable management.

The live range includes 800mm, 1 metre, 1.2 metre, 1.5 metre and 3 metre lengths depending on tray width. Nominal widths currently listed are 60mm, 100mm, 150mm, 200mm, 300mm and 450mm. All variants in this datasheet are Electro Zinc plated and 60mm deep.

SPECIFICATION

Product Type	Wire cable basket tray - 60mm depth profile
Available Lengths	800mm, 1m, 1.2m, 1.5m and 3m (availability varies by width)
Depth	60mm nominal
Finish	Electro Zinc Plated (EZ) - internal / dry environments
Mesh / Wire Spacing	50mm x 100mm nominal open mesh layout
Construction	Welded and formed steel wire basket
Nominal Widths	60, 100, 150, 200, 300 and 450mm
Supply	Sold individually

KEY FEATURES

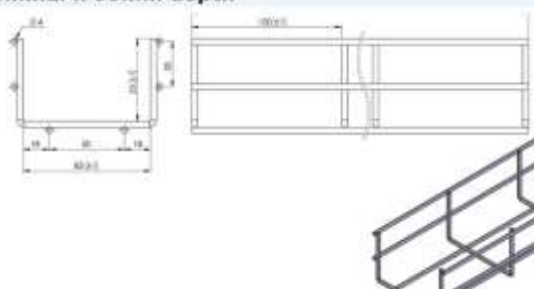
• 60mm basket depth • Electro Zinc plated finish • Six nominal widths currently listed • 800mm to 3 metre live variants	• Multiple stocked lengths by width • 50 x 100mm open mesh layout • Open design supports airflow and cable access • Intended for dry internal installations
--	--

TECHNICAL DRAWING

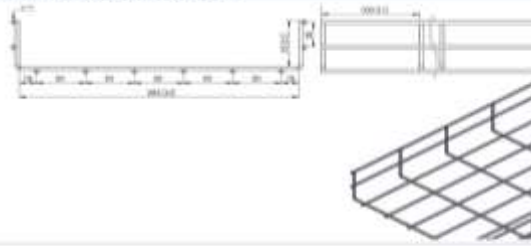
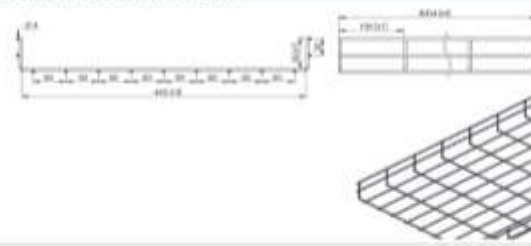
Technical Drawing Reference - 60mm Depth Basket Tray Range

Representative 3 metre technical views from the supplied drawing set. The live Direct Channel range also includes shorter 800mm, 1m, 1.2m and 1.5m variants depending on width.

Representative profile - 100mm nominal x 60mm depth



Representative 3 metre technical drawing board for the 60mm depth cable basket family, based on the supplied manufacturer drawing set. The live range also includes shorter lengths; use the product table below for each SKU's listed overall length. A dedicated 200mm x 60mm supplier sheet was not present in the supplied drawing set.

Representative profile - 300mm nominal x 60mm depth

Representative profile - 450mm nominal x 60mm depth


The supplier drawings shown above use a 3004 (±5) overall length and 100 (±1) longitudinal pitch for the 3m reference product. Shorter live website variants use the same 60mm-depth basket family but their overall length is the listed SKU length. A dedicated 200mm x 60mm supplier drawing was not present in the supplied set.

AVAILABLE SIZES / PRODUCT RANGE

SKU	Nominal Width	Length	Depth
CTB60/60	60mm	3000mm	60mm
CTB100/60	100mm	3000mm	60mm
CTB150/60	150mm	3000mm	60mm
CTB200/60	200mm	3000mm	60mm
CTB300/60	300mm	3000mm	60mm
CTB450/60	450mm	3000mm	60mm
CTB60/60.1000	60mm	1000mm	60mm
CTB100/60-1000	100mm	1000mm	60mm
CTB100/60-1200	100mm	1200mm	60mm
CTB60/60.800	60mm	800mm	60mm
CTB100/60-1500	100mm	1500mm	60mm
CTB100/60.800	100mm	800mm	60mm
CTB150/60.800	150mm	800mm	60mm
CTB150/60.1000	150mm	1000mm	60mm
CTB200/60.800	200mm	800mm	60mm
CTB300/60.800	300mm	800mm	60mm
CTB200/60.1000	200mm	1000mm	60mm

Current live 60mm-depth Electro Zinc products are listed below. Length availability varies by width. The 3 metre technical drawings above are dimensional references for the product family and should not be read as the overall length of shorter SKUs.

TYPICAL APPLICATIONS

Power, data and communications cable runs	Commercial and industrial interiors
Plant rooms and service corridors	Server rooms and data environments
Higher-volume cable containment	Internal M&E installations

To Order: Visit directchannel.uk.com or call 0121 270 8507 | Trade & bulk enquiries: sales@directchannel.uk.com | Most orders dispatched within 24 hours.

DISCLAIMER & LEGAL NOTICE

Direct Channel Support Systems Ltd has made every reasonable effort to ensure the accuracy and completeness of the information contained in this datasheet. All product specifications, dimensions, and technical details are provided for guidance purposes only. Direct Channel Support Systems Ltd reserves the right to alter, update, or withdraw any product or specification at any time and without prior notice. To the fullest extent permitted by law, Direct Channel Support Systems Ltd accepts no liability for any loss, damage, or consequential loss arising from reliance on the information contained herein. Customers are advised to verify all specifications prior to ordering. For the most current product information visit directchannel.uk.com or contact our sales team.