

R-RBP RAWLBOLT® - BOLT PROJECTING

For use in cracked and non-cracked concrete



FEATURES AND BENEFITS ✓

For use in cracked and non-cracked concrete, hollow-core slabs, flooring blocks and ceramics.

RAWLBOLT® - first ever mechanical anchor in the world, forerunner of all of the later mechanical anchors.

Large contact area of expanded arms increases load-bearing capacity and security.

Wide range of diameters (M6 to M20).

User-friendly - enables fast installation.

Three-pieces expanding sleeve of maximum expansion provides optimal load and safety of use in any substrate.

Product recommended for applications requiring fire resistance.

SUBSTRATES ✓



Cracked concrete C20/25-C50/60



Non-cracked concrete C20/25-C50/60



Unreinforced concrete



Reinforced concrete



Hollow-core slab



Concrete hollow floor block (eg. Teriva)



Masonry



High-density natural stone





APPLICATIONS

Barriers


Doors and windows

Gates

Repair of machinery

Sanitary and gas installations

Steel structures

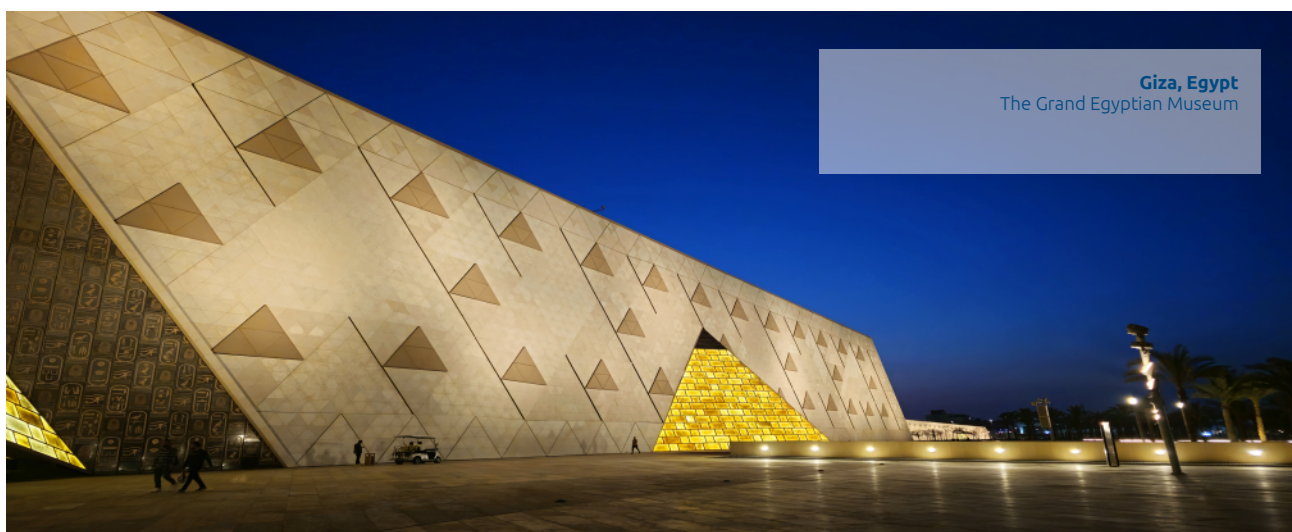


Giza, Egypt
The Grand Egyptian Museum

INSTALLATION GUIDE



1. Drill a hole of required diameter and depth. Note: When fixing into brickwork, mortar joints should be avoided.
2. Clear the hole of drilling dust and debris (using blowpump or equivalent method).
3. Remove nut and washer and insert anchor into hole. Tap home with hammer until flush with surface.
4. Position fixture over the projecting bolt.
5. Add washer and nut and tighten to recommended torque.

INSTALLATION DATA

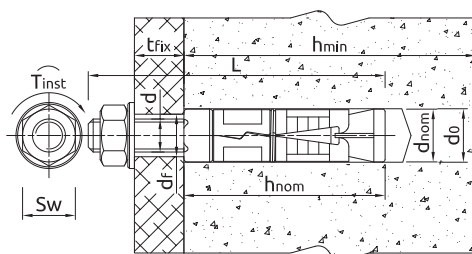

Size			M6	M8	M10	M12	M16	M20
Thread diameter	d	[mm]	6	8	10	12	16	20
Hole diameter in substrate	d ₀	[mm]	12	14	16	20	25	32
Hole diameter in fixture	d _f	[mm]	6,5	9	11	13	17	22
Installation torque	T _{inst}	[Nm]	6,5	15	27	50	120	230
Wrench size	Sw	[mm]	10	13	17	19	24	30
Min. hole depth in substrate	h _{0,s}	[mm]	50	55	65	85	125	140
Min. installation depth	h _{nom}	[mm]	45	50	60	80	120	135
Min. substrate thickness	h _{min,s}	[mm]	100	100	100	100	142,5	172,5
Min. edge distance	c _{min}	[mm]	52,5	60	75	90	142,5	172,5
Min. spacing	s _{min}	[mm]	35	40	50	60	95	115

MECHANICAL PROPERTIES

Size			M6	M8	M10	M12	M16	M20
Nominal ultimate tensile strength - tension	f _{uk}	[N/mm ²]	500	500	500	500	500	500
Nominal yield strength	f _{yk}	[N/mm ²]	400	400	400	400	400	400
Cross sectional area	A _s	[mm ²]	20,1	36,6	58	84,3	157	245
Elastic section modulus	W _{el}	[mm ³]	21,2	50,2	98,1	169,6	402,1	785,4
Characteristic bending resistance	M _{Rk,s} ⁰	[Nm]	12,7	30,1	58,9	101,7	241,2	471,2
Design bending resistance	M	[Nm]	10,1	24,1	47,1	81,4	193	376,9

BASIC PERFORMANCE DATA

Performance data for single anchor without influence of edge distance and spacing

Size			M6	M8	M10	M12	M16	M20
Nominal embedment depth	h _{nom}	[mm]	45	50	60	80	120	135
MEAN ULTIMATE RESISTANCE								
UNCRACKED CONCRETE								
Tension load	N _{Rt,m}	[kN]	7,8	9,75	15,6	20,8	52	65
Shear load	V _{Rt,m}	[kN]	5,53	10,07	15,95	23,19	43,18	67,38
CRACKED CONCRETE								
Tension load	N _{Rt,m}	[kN]	5,2	6,5	7,8	15,6	20,8	39

Size			M6	M8	M10	M12	M16	M20
Shear load	$V_{Rd,m}$	[kN]	5,53	10,07	15,95	23,19	43,18	67,38
CHARACTERISTIC RESISTANCE								
UNCRACKED CONCRETE								
Tension load	N_{Rk}	[kN]	6	7,5	12	16	40	50
Shear load	V_{Rk}	[kN]	5,03	9,15	14,5	21,08	39,25	61,25
CRACKED CONCRETE								
Tension load	N_{Rk}	[kN]	4	5	6	12	16	30
Shear load	V_{Rk}	[kN]	5,03	8,71	12,17	21,08	39,25	61,25
DESIGN RESISTANCE								
UNCRACKED CONCRETE								
Tension load	N_{Rd}	[kN]	3,33	4,17	6,67	8,89	22,22	27,78
Shear load	V_{Rd}	[kN]	4,02	7,32	11,6	16,86	31,4	49
CRACKED CONCRETE								
Tension load	N_{Rd}	[kN]	2,22	2,78	3,33	6,67	8,89	16,67
Shear load	V_{Rd}	[kN]	4,02	5,81	8,12	16,86	31,4	49
RECOMMENDED LOAD								
UNCRACKED CONCRETE								
Tension load	N_{rec}	[kN]	2,38	2,98	4,76	6,35	15,87	19,84
Shear load	V_{rec}	[kN]	2,87	5,23	8,29	12,04	22,43	35
CRACKED CONCRETE								
Tension load	N_{rec}	[kN]	1,59	1,99	2,38	4,76	6,35	11,91
Shear load	V_{rec}	[kN]	2,87	4,15	5,8	12,04	22,43	35

DESIGN PERFORMANCE DATA

Static loads

Size			M6	M8	M10	M12	M16	M20
Effective embedment depth	h_{ef}	[mm]	35	40	50	60	95	115
TENSION LOAD								
STEEL FAILURE								
Characteristic resistance	$N_{Rk,s}$	[kN]	10,05	18,3	29	42,15	78,5	122,5
Partial safety factor	γ_{MS}	[-]	1,5	1,5	1,5	1,5	1,5	1,5
PULL-OUT FAILURE								
Characteristic resistance in uncracked concrete C20/25	$N_{Rk,p,ucr}$	[kN]	6	7,5	12	16	40	50
Characteristic resistance in cracked concrete C20/25	$N_{Rk,p,cr}$	[kN]	4	5	6	12	16	30
Installation safety factor	γ_{inst}	[-]	1,2	1,2	1,2	1,2	1,2	1,2
Increasing factors for concrete C30/37	ψ_c	[-]	1,22	1,22	1,22	1,22	1,22	1,22
Increasing factors for concrete C40/50	ψ_c	[-]	1,41	1,41	1,41	1,41	1,41	1,41
Increasing factors for concrete C50/60	ψ_c	[-]	1,55	1,55	1,55	1,55	1,55	1,55
CONCRETE CONE FAILURE								
Factor for cracked concrete	$k_{cr,N}$	[-]	7,7	7,7	7,7	7,7	7,7	7,7
Factor for uncracked concrete	$k_{ucr,N}$	[-]	11	11	11	11	11	11
Installation safety factor	γ_{inst}	[-]	1,2	1,2	1,2	1,2	1,2	1,2
Spacing	$s_{cr,N}$	[mm]	105	120	150	180	285	345
Edge distance	$c_{cr,N}$	[mm]	52,5	60	75	90	143	173
CONCRETE SPLITTING FAILURE								
Spacing	$s_{cr,N}$	[mm]	105	120	150	180	285	345
Edge distance	$c_{cr,N}$	[mm]	53	60	75	90	143	173
Installation safety factor	γ_{inst}	[-]	1,2	1,2	1,2	1,2	1,2	1,2
SHEAR LOAD								
STEEL FAILURE								
Characteristic resistance without lever arm	$V_{Rk,s}^0$	[kN]	5,03	9,15	14,5	21,08	39,25	61,25
Ductility factor	k_{γ}	[-]	0,8	0,8	0,8	0,8	0,8	0,8
Characteristic resistance with lever arm	$M_{Rk,s}$	[Nm]	7,63	18,74	37,39	65,52	166,52	324,62
Partial safety factor	γ_{MS}	[-]	1,25	1,25	1,25	1,25	1,25	1,25
CONCRETE PRY-OUT FAILURE								
Factor	k	[-]	1	1	1	2	2	2
Installation safety factor	γ_{inst}	[-]	1,2	1,2	1,2	1,2	1,2	1,2
CONCRETE EDGE FAILURE								
Effective length of anchor	ℓ_f	[mm]	35	40	50	60	95	115
Anchor diameter	d_{nom}	[mm]	6	8	10	12	16	20
Installation safety factor	γ_{inst}	[-]	1,2	1,2	1,2	1,2	1,2	1,2

Resistance to tension and shear loads under fire exposure

Size			M6	M8	M10	M12	M16	M20
Effective embedment depth	h_{ef}	[mm]	35	40	50	60	95	115
R (for EI) = 30 min								
TENSION LOAD								
STEEL FAILURE								

Size			M6	M8	M10	M12	M16	M20
Characteristic resistance	$N_{Rk,s,f,30}$	[kN]	0,2	0,4	0,9	1,7	3,1	4,9
PULL-OUT FAILURE								
Characteristic resistance	$N_{Rk,p,f,30}$	[kN]	1	1,3	1,5	3	4	7,5
SHEAR LOAD								
STEEL FAILURE								
Characteristic resistance without lever arm	$V_{Rk,s,f,30}$	[kN]	0,2	0,4	0,9	1,7	3,1	4,9
Characteristic resistance with lever arm	$M^0_{Rk,s,f,30}$	[Nm]	0,2	0,4	1,1	2,6	6,7	13
R (for EI) = 60 min								
TENSION LOAD								
STEEL FAILURE								
Characteristic resistance	$N_{Rk,s,f,60}$	[kN]	0,2	0,3	0,8	1,3	2,4	3,7
PULL-OUT FAILURE								
Characteristic resistance	$N_{Rk,p,f,60}$	[kN]	1	1,3	1,5	3	4	7,5
SHEAR LOAD								
STEEL FAILURE								
Characteristic resistance without lever arm	$V_{Rk,s,f,60}$	[kN]	0,2	0,3	0,8	1,3	2,4	3,7
Characteristic resistance with lever arm	$M^0_{Rk,s,f,60}$	[Nm]	0,1	0,3	1	2	5	9,7
R (for EI) = 90 min								
TENSION LOAD								
STEEL FAILURE								
Characteristic resistance	$N_{Rk,s,f,90}$	[kN]	0,1	0,3	0,6	1,1	2	3,2
PULL-OUT FAILURE								
Characteristic resistance	$N_{Rk,p,f,90}$	[kN]	1	1,3	1,5	3	4	7,5
SHEAR LOAD								
STEEL FAILURE								
Characteristic resistance without lever arm	$V_{Rk,s,f,90}$	[kN]	0,1	0,3	0,6	1,1	2	3,2
Characteristic resistance with lever arm	$M^0_{Rk,s,f,90}$	[Nm]	0,1	0,3	0,7	1,7	4,3	8,4
R (for EI) = 120 min								
TENSION LOAD								
STEEL FAILURE								
Characteristic resistance	$N_{Rk,s,f,120}$	[kN]	0,1	0,2	0,5	0,8	1,6	2,5
PULL-OUT FAILURE								
Characteristic resistance	$N_{Rk,s}$	[kN]	0,8	1	1,2	2,4	3,2	6
SHEAR LOAD								
STEEL FAILURE								
Characteristic resistance without lever arm	$V_{Rk,s}$	[kN]	0,1	0,2	0,5	0,8	1,6	2,5
Characteristic resistance with lever arm	$M^0_{Rk,s,f,120}$	[Nm]	0,1	0,2	0,6	1,3	3,3	6,5

LOGISTICAL DATA

SKU	Base-sales unit	Unit pack	Bulk pack	Pallet	Single Package - Gross Weight	Bulk Package - Gross Weight	Palette - Gross Weight	Barcode
R-RBP-M06/10W	pcs.	50.0	400.0	16000.0	1.6	12.7	508.0	5906675283593
R-RBP-M06/25W	pcs.	50.0	400.0	16000.0	1.7	13.8	552.0	5906675283616
R-RBP-M06/60W	pcs.	50.0	50.0	8000.0	2.0	2.0	320.0	5906675283630
R-RBP-M08/10W	pcs.	50.0	400.0	9600.0	2.8	22.9	549.6	5906675283654
R-RBP-M08/25W	pcs.	50.0	50.0	8000.0	3.1	3.1	496.0	5906675283678
R-RBP-M08/60W	pcs.	50.0	50.0	8000.0	3.7	3.7	592.0	5906675283692
R-RBP-M10/30W	pcs.	50.0	50.0	6000.0	5.3	5.3	636.0	5906675283739
R-RBP-M10/60W	pcs.	50.0	50.0	8000.0	6.0	6.0	960.0	5906675283753
R-RBP-M12/15W	pcs.	25.0	25.0	4000.0	4.6	4.6	736.0	5906675283760
R-RBP-M12/30W	pcs.	25.0	25.0	4000.0	4.9	4.9	784.0	5906675283777
R-RBP-M12/75W	pcs.	25.0	25.0	3000.0	5.8	5.8	696.0	5906675283784
R-RBP-M16/15W	pcs.	10.0	10.0	1600.0	4.4	4.4	704.0	5906675283791
R-RBP-M16/35W	pcs.	10.0	10.0	1600.0	4.6	4.6	736.0	5906675283807
R-RBP-M20/15W	pcs.	10.0	10.0	960.0	7.2	7.2	692.4	5906675283821

RELATED PRODUCTS

DRILLING	Rotary Hammer Drill SDS plus; 850W; 26mm; 2.5J R-PRH-26850 	Cordless RawlHammer 18V SDS plus R-PRH18-26 	Drill bits Brickdrill SDS plus RT-SDSB 	Drill bits Rebardrill SDS plus RT-SDSR 
CLEANING	Blow Pump R-BLOWPUMP 			
ANCHORING	Torque wrench 20-100 Nm 1/2" R-HTW-20-100 	Locksmiths' Hammers RT-HAM 	MECHANICAL ANCHOR SETTING TOOL SDS PLUS RT-SDSI-MA 	
SAFETY	Protective gloves for power tools R-PGL 			