

Premier Universal Cable Tray & Basket Lids

1.5m Hot Dip Galvanised | 50-450mm | S235 JR | PLD Range

Direct Channel Premier Universal Lids provide a protective cover for compatible cable tray and cable basket systems, helping shield installed cables from dust, debris and general environmental exposure.

Manufactured from S235 JR mild steel with a hot dip galvanised finish, each lid is supplied in a 1500mm length with 13mm returned edges and pre-punched fixing holes. The range covers nominal tray widths from 50mm to 450mm and is suitable for internal and external cable-containment installations.


SPECIFICATION

Material	S235 JR mild steel
Finish	Hot Dip Galvanised (HDG)
Coating Standard	TS EN ISO 1461 / TS 822
Length	1500mm $\pm$ 3mm
Side Return	13mm $\pm$ 1mm
Fixing Holes	$\varnothing$ 6mm pre-punched
Hole Position	25mm $\pm$ 1mm from end; 12mm $\pm$ 1mm from side
Thickness	0.9mm / 1.0mm / 1.2mm depending on width

KEY FEATURES

1.5m hot dip galvanised steel lid 13mm returned side edges - S235 JR mild steel construction - Suitable for internal & external use	- Fits tray / basket widths 50-450mm - Pre-punched $\varnothing$6mm fixing holes 0.9-1.2mm thickness by width - Compatible hold-down clips available
--	--

TECHNICAL DRAWING

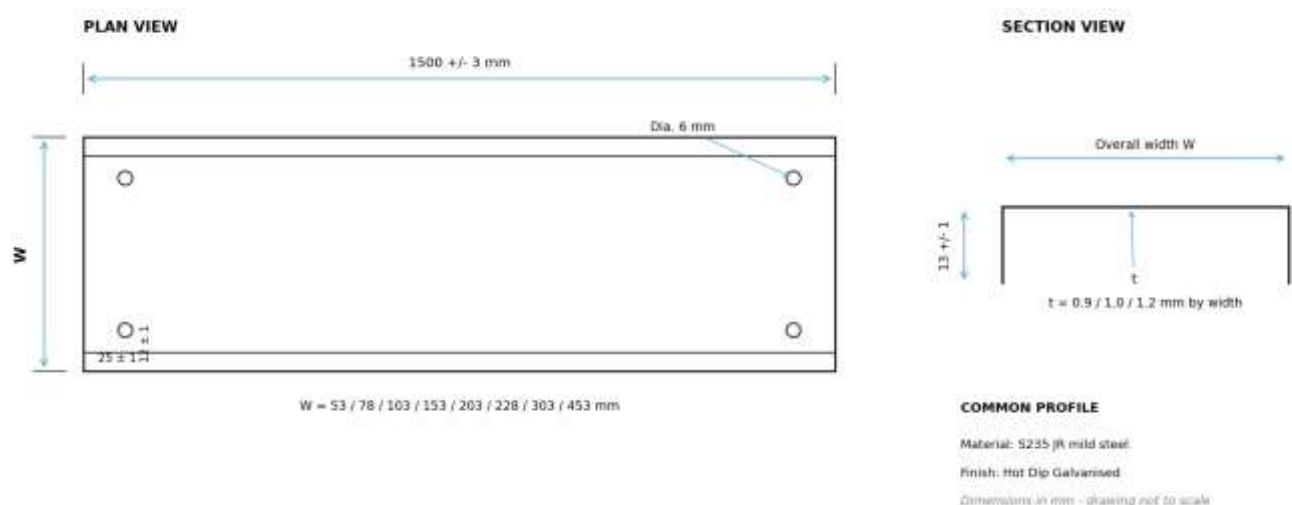

Premier Universal lid - common profile and fixing-hole arrangement, drawing not to scale

AVAILABLE OPTIONS

Nominal Width	Overall Lid Width	Thickness	Code
50mm	53 ±1mm	0.9mm	PLD50G
75mm	78 ±1mm	0.9mm	PLD75G
100mm	103 ±1mm	0.9mm	PLD100G
150mm	153 ±1mm	1.0mm	PLD150G
200mm	203 ±1mm	1.0mm	PLD200G
225mm	228 ±1mm	1.0mm	PLD225G
300mm	303 ±1mm	1.2mm	PLD300G
450mm	453 ±1mm	1.2mm	PLD450G

All lids are 1500mm long with 13mm returned edges and Ø6mm fixing holes. Overall lid width is nominal tray width + 3mm. For tray installations, use the appropriate compatible hold-down clip for the tray type; clips are supplied separately.

TYPICAL APPLICATIONS

Cable tray lid / cover installations	Cable basket lid / cover installations
Commercial & industrial M&E	Plant rooms & service routes
Internal cable containment	External HDG containment

To Order: Visit directchannel.uk.com or call **0121 270 8507** | Trade & bulk enquiries: sales@directchannel.uk.com | Most orders dispatched same or next working day.

DISCLAIMER & LEGAL NOTICE

Direct Channel Support Systems Ltd has made every reasonable effort to ensure the accuracy and completeness of the information contained in this datasheet. All product specifications, dimensions, and technical details are provided for guidance purposes only. Direct Channel Support Systems Ltd reserves the right to alter, update, or withdraw any product or specification at any time and without prior notice. To the fullest extent permitted by law, Direct Channel Support Systems Ltd accepts no liability for any loss, damage, or consequential loss arising from reliance on the information contained herein. Customers are advised to verify all specifications prior to ordering. For the most current product information visit directchannel.uk.com or contact our sales team.