

Strut Pro Runner - 300mm Slotted Ladder Cable Tray Rung Bracket

STR300G | 300mm Nominal Runner Length | Slotted Centre Section | Hot Dip Galvanised (HDG)

The STR300G Strut Pro Runner is a ladder cable tray rung bracket with a 300mm nominal runner section, a slotted centre profile and formed fixing ends. It is supplied in a hot dip galvanised (HDG) finish.

The supplied product image shows five elongated openings through the centre section and fixing holes through the end brackets. Each slot is approximately 27.5mm long by 12.5mm wide, and the end fixing hole diameter is approximately 12mm. The 300mm nominal size applies to the runner section between the formed end brackets, not to the overall bracket length.


SPECIFICATION

Product Type	Ladder cable tray rung bracket / runner
Product Code	STR300G
Nominal Runner Length	300mm - measured across the runner section between formed end brackets
Centre Section	Slotted - five elongated openings visible in supplied product image
Approx. Individual Slot	27.5 x 12.5mm
End Fixing Hole	Approx. Ø12mm
Finish	Hot Dip Galvanised (HDG)
Supply	Individual bracket

KEY FEATURES

• 300mm nominal runner section • Five elongated openings shown • Approx. Ø12mm end fixing hole • Direct Channel code STR300G	• Slotted centre section • Formed fixing ends • Hot dip galvanised finish • Separate from non-slotted range
---	--

TECHNICAL DRAWING

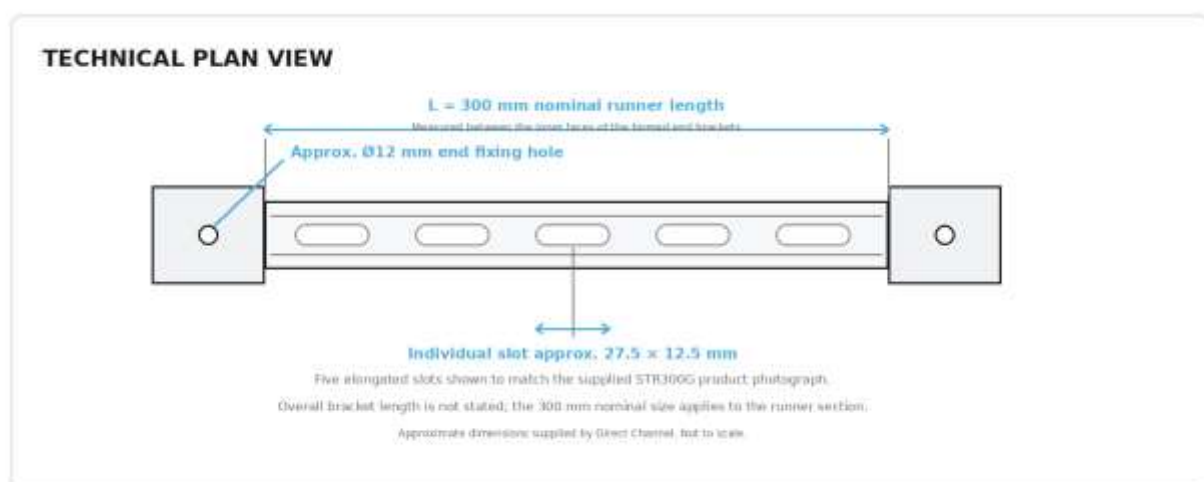

Product-accurate reference using the supplied STR300G photograph. L = 300mm nominal runner length measured between the formed end brackets; individual slots approx. 27.5 x 12.5mm; end fixing hole approx. Ø12mm. Overall bracket length is not stated. Not to scale.

AVAILABLE PRODUCT

SKU	Nominal Runner Length	Centre Section	Finish
STR300G	300mm	Slotted	HDG

STR300G is the slotted 300mm version and is intentionally shown separately from the non-slotted runner range. The nominal 300mm dimension applies to the runner section rather than the complete overall bracket length. No load rating, material grade, fixing torque or exact dimensional tolerance has been added because these were not supplied.

TYPICAL APPLICATIONS

Ladder cable tray rung assemblies	Cable support bracket fabrication
Tray support and spacing assemblies	General cable-management support work
Replacement / project-specific runner use	Use where the slotted 300mm format is required

To Order: Visit directchannel.uk.com or call 0121 270 8507 | **Trade & bulk enquiries:** sales@directchannel.uk.com | **95% of orders are dispatched within 24 hours.**

DISCLAIMER & LEGAL NOTICE

Direct Channel Support Systems Ltd has made every reasonable effort to ensure the accuracy and completeness of the information contained in this datasheet. All product specifications, dimensions, and technical details are provided for guidance purposes only. Direct Channel Support Systems Ltd reserves the right to alter, update, or withdraw any product or specification at any time and without prior notice. To the fullest extent permitted by law, Direct Channel Support Systems Ltd accepts no liability for any loss, damage, or consequential loss arising from reliance on the information contained herein. Customers are advised to verify all specifications prior to ordering. For the most current product information visit directchannel.uk.com or contact our sales team.