

Threaded Rod - Bright Zinc Plated (BZP) - Standard Grade

M6-M24 | 1m / 2m / 3m Lengths | Fully Threaded | Mild Steel

Direct Channel Bright Zinc Plated threaded rod is a fully threaded mild-steel fastening solution for suspension, support and general construction assemblies. The BZP finish provides basic corrosion protection for dry internal and general-purpose applications.

This range covers M6 to M24 thread sizes in 1 metre, 2 metre and 3 metre lengths. Live listings identify standard mild-tensile products across the range, with grade wording varying by size between Grade 4 and Grade 4.8.


SPECIFICATION

Product Type	Fully threaded metric rod
Material	Mild steel
Finish	Bright Zinc Plated (BZP)
Thread Sizes	M6, M8, M10, M12, M16, M20 and M24
Lengths	1m, 2m and 3m
Thread Type	Metric coarse thread; fully threaded
Strength Class	Standard mild tensile; live listings vary between Grade 4 and Grade 4.8 wording
Supply	Sold individually; minimum order quantities may apply

KEY FEATURES

• M6-M24 threaded rod range • Bright zinc plated finish • Mild steel construction • Compatible support-system component	• 1m, 2m and 3m lengths • Fully threaded metric form • For dry internal/general use • Sold as full lengths
--	---

TECHNICAL DRAWING

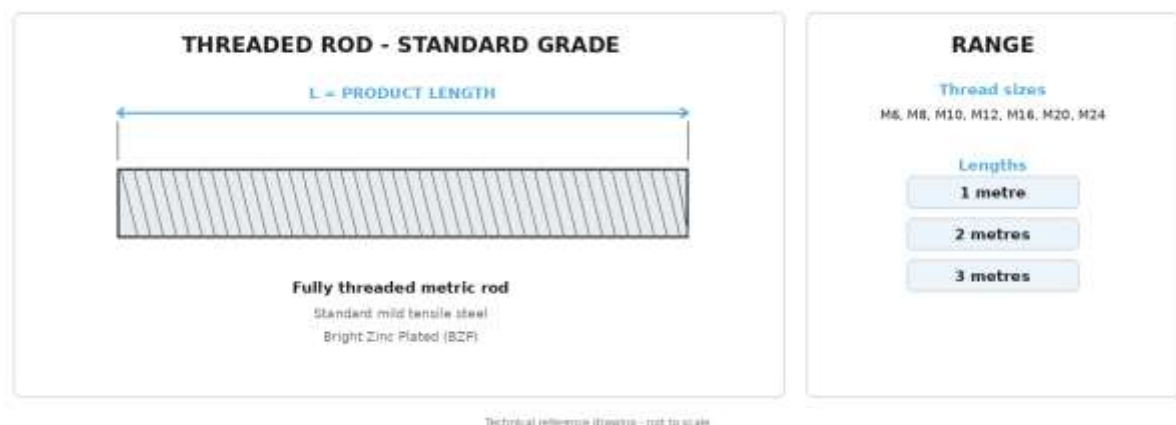

General technical reference for the standard BZP threaded rod range. Product diameter and overall length vary by SKU. Metric coarse threading is used across the range. Not to scale.

AVAILABLE SIZES / PRODUCT RANGE

Thread Size	1 Metre	2 Metre	3 Metre
M6	TR1-6	TR2-6	TR3-6
M8	TR1-8	TR2-8	TR3-8
M10	TR1-10	TR2-10	TR3-10I
M12	TR1-12	TR2-12	TR3-12
M16	TR1-16	TR2-16	TR3-16
M20	TR1-20	TR2-20	TR3-20
M24	TR1-24	TR2-24	TR3-24

Live product codes shown exactly as currently listed. Note the M10 3 metre BZP product uses code TR3-10I on the live website.

TYPICAL APPLICATIONS

Suspended strut channel systems	HVAC and M&E support systems
Pipework and containment supports	Mechanical support frameworks
Ceiling suspension and brackets	General construction fixings

To Order: Visit directchannel.uk.com or call **0121 270 8507** | Trade & bulk enquiries: sales@directchannel.uk.com | Most orders dispatched same or next working day.

DISCLAIMER & LEGAL NOTICE

Direct Channel Support Systems Ltd has made every reasonable effort to ensure the accuracy and completeness of the information contained in this datasheet. All product specifications, dimensions, and technical details are provided for guidance purposes only. Direct Channel Support Systems Ltd reserves the right to alter, update, or withdraw any product or specification at any time and without prior notice. To the fullest extent permitted by law, Direct Channel Support Systems Ltd accepts no liability for any loss, damage, or consequential loss arising from reliance on the information contained herein. Customers are advised to verify all specifications prior to ordering. For the most current product information visit directchannel.uk.com or contact our sales team.