

Threaded Rod - Hot Dipped Galvanised (HDG) - Standard Grade

M8-M24 | 1m / 2m / 3m Lengths | Fully Threaded | Mild Steel

Direct Channel Hot Dipped Galvanised threaded rod is designed for internal and external support applications where greater corrosion resistance is required. The fully threaded mild-steel rod is suitable for suspended services, frameworks, pipework and general M&E support systems.

The range covers M8 to M24 in 1 metre, 2 metre and 3 metre lengths. Use compatible HDG nuts and washers: several live listings specifically state that the HDG thread pattern is not suitable for BZP or stainless-steel nuts.


SPECIFICATION

Product Type	Fully threaded metric rod
Material	Mild steel
Finish	Hot Dipped Galvanised (HDG)
Thread Sizes	M8, M10, M12, M16, M20 and M24
Lengths	1m, 2m and 3m
Thread Type	Metric coarse thread; fully threaded
Strength Class	Standard mild tensile; Grade 4.8 stated on multiple live listings
Compatibility	Use matching HDG nuts and washers

KEY FEATURES

• M8-M24 threaded rod range • Hot dipped galvanised finish • Suitable for internal/external use • Use matching HDG fixings	• 1m, 2m and 3m lengths • Fully threaded metric form • Improved corrosion resistance • Sold as full lengths
---	--

TECHNICAL DRAWING

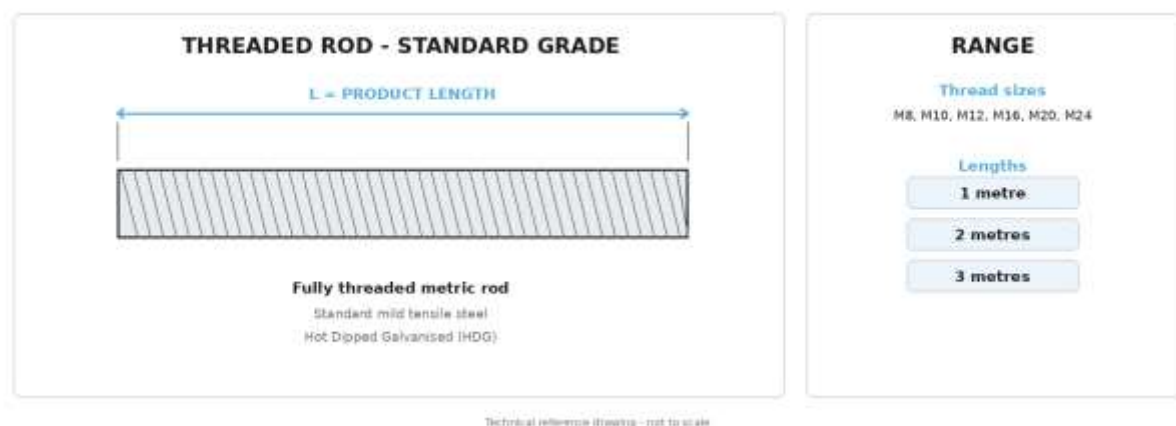

General technical reference for the standard HDG threaded rod range. Product diameter and overall length vary by SKU. Not to scale.

AVAILABLE SIZES / PRODUCT RANGE

Thread Size	1 Metre	2 Metre	3 Metre
M8	TR1H-8	TR2H-8	TR3H-8
M10	TR1H-10	TR2H-10	TR3H-10
M12	TR1H-12	TR2H-12	TR3H-12
M16	TR1H-16	TR2H-16	TR3H-16
M20	TR1H-20	TR2H-20	TR3H-20
M24	TR1H-24	TR2H-24	TR3H-24

Live product codes shown exactly as listed for the standard HDG range.

TYPICAL APPLICATIONS

Suspended strut channel systems	HVAC and M&E support systems
Pipework and containment supports	Mechanical support frameworks
Ceiling suspension and brackets	General construction fixings

To Order: Visit directchannel.uk.com or call **0121 270 8507** | Trade & bulk enquiries: sales@directchannel.uk.com | Most orders dispatched same or next working day.

DISCLAIMER & LEGAL NOTICE

Direct Channel Support Systems Ltd has made every reasonable effort to ensure the accuracy and completeness of the information contained in this datasheet. All product specifications, dimensions, and technical details are provided for guidance purposes only. Direct Channel Support Systems Ltd reserves the right to alter, update, or withdraw any product or specification at any time and without prior notice. To the fullest extent permitted by law, Direct Channel Support Systems Ltd accepts no liability for any loss, damage, or consequential loss arising from reliance on the information contained herein. Customers are advised to verify all specifications prior to ordering. For the most current product information visit directchannel.uk.com or contact our sales team.