

Eyebolts - Bright Zinc Plated Steel


Continuous ring | M6-M16 | HEYE0650B, HEYE0860B, HEYE1073B, HEYE1290B, HEYE1695B

Area of application: Suspension of heavy loads, use in turnbuckles acc. to DIN 1480 or in anchors.

SPECIFICATION

Product Type	Eyebolt with continuous ring
M6-M12 Raw Material	Q235B steel
M6-M12 Grade	8.8, undersize body
M6-M12 Surface / Finish	ZP CR3 zinc plated
Coating Standard	ISO 4042
Quality Acceptance	ISO 3269
MTC Certification	EN 10204 3.1
Thread Inspection	Go gauge 6h / No Go gauge 6g

TECHNICAL DRAWING

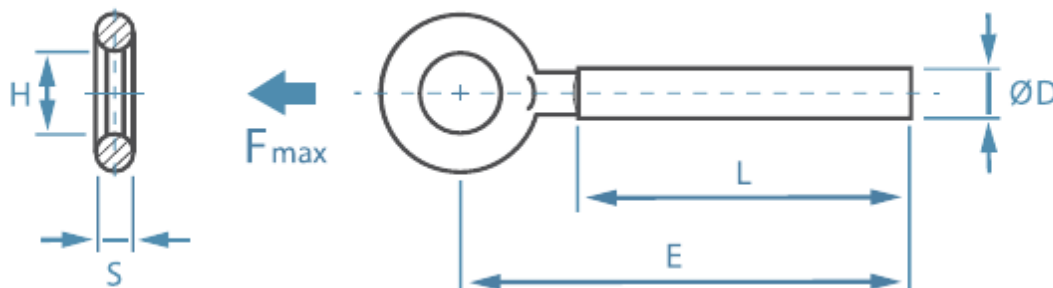

Eyebolt technical drawing. Not to scale.

AVAILABLE SIZES & MANUFACTURER DIMENSIONS

Thread	L (mm)	E (mm)	TL (mm)	H (mm)	Fmax (N)	Code
M6	48.50-50.00	62.66-64.60	70.81-73.00	9.75-10.25	1,850	HEYE0650B
M8	58.20-60.00	73.14-75.40	84.37-87.00	11.55-12.05	3,600	HEYE0860B
M10	70.81-73.00	93.60	105.73-109.00	14.25-14.75	5,400	HEYE1073B
M12	87.30-90.00	110.10-113.50	127.07-131.00	16.75-17.25	8,100	HEYE1290B
M16	95	122.1	156	22.70-23.30	15,400	HEYE1695B

To Order: Visit directchannel.uk.com or call **0121 270 8507** | Trade & bulk enquiries: sales@directchannel.uk.com | Most orders dispatched same or next working day.

DISCLAIMER & LEGAL NOTICE

Direct Channel Support Systems Ltd has made every reasonable effort to ensure the accuracy and completeness of the information contained in this datasheet. All product specifications, dimensions, and technical details are provided for guidance purposes only. Direct Channel Support Systems Ltd reserves the right to alter, update, or withdraw any product or specification at any time and without prior notice. To the fullest extent permitted by law, Direct Channel Support Systems Ltd accepts no liability for any loss, damage, or consequential loss arising from reliance on the information contained herein. Customers are advised to verify all specifications prior to ordering. For the most current product information visit directchannel.uk.com or contact our sales team.